

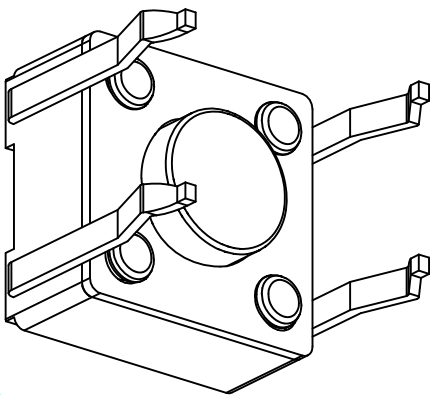
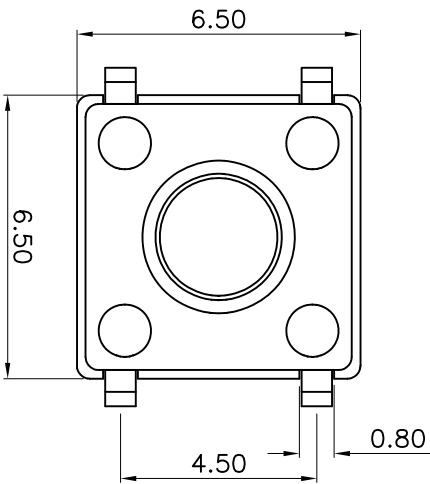
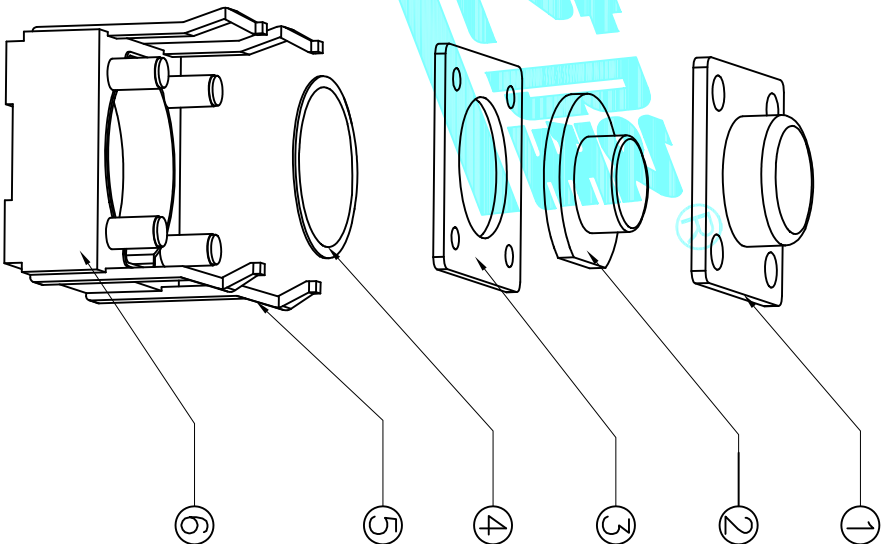



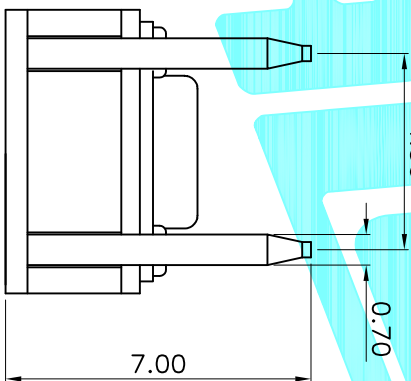

NO.1	
PART NO	H
A	4.3
B	4.5
C	5
D	5.5

NO.2	
PART NO	vigor
1	70±30
2	100±50
3	160±50
4	260±50
5	320±80
6	350±80
7	520±130

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	CS210/1PC
D	SUS/2PCS
E	CS210/2PCS

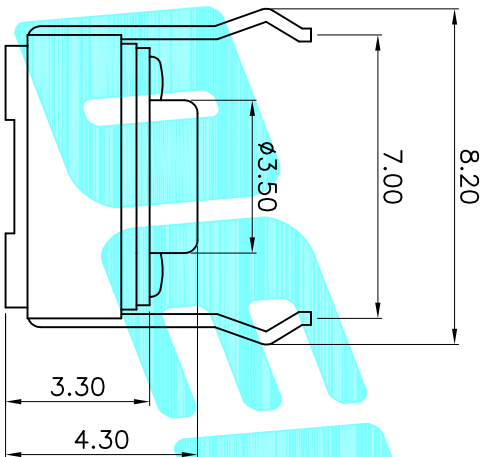

Circuit Diagram

Note:
1.Rating: 12V 50mA

NO.4	
PART NO	NOTE
1~9	SERIAL NUMBER

NO.5	
PART NO	NOTE
B	Bulk
R	Tape&Reel

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
30~0.1±						
10~0.20						
5~0.13						
~ 5						
±2°						
DRAWING NO.						
PROJ. 1 OF 1						

APPROVALS		DATE	
DRAWN	G.M.Chen	2015/2/04	
CHECKED			
APPROVALS			

OSRON 高亮LED
ELECTRONICS CO.,LTD

⑥	Base	1	PA	Black
⑤	Terminal	4	Brass(0.30t)	Plating silver
④	Contact Spring	1	Brass	Plating silver
③	Cover	1	PA	Clarity
②	KNOB	1	PA	Black
①	Waterproof Cover	1	Silastic	Blue
ITEM	PART NAME	QTY.	MATERIAL	FINISHING