

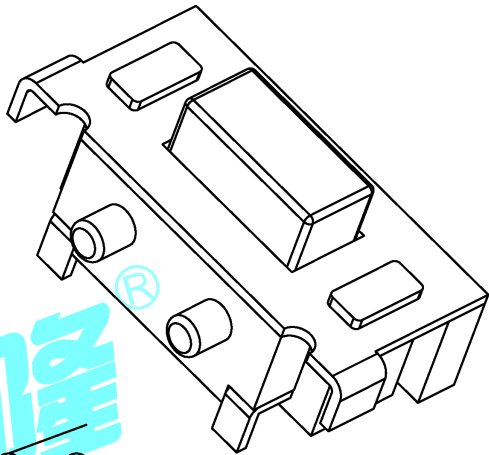
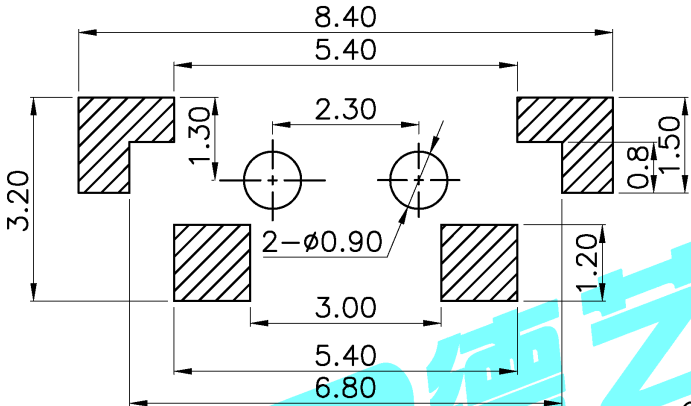


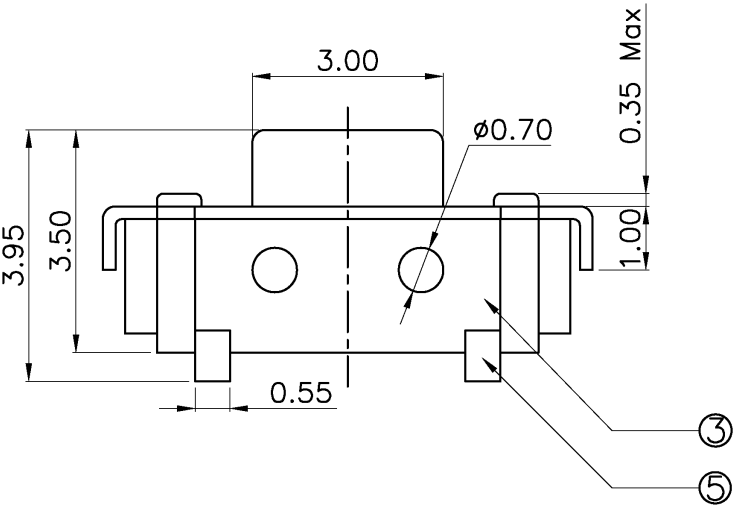

Circuit diagram

PCB Layout recommended

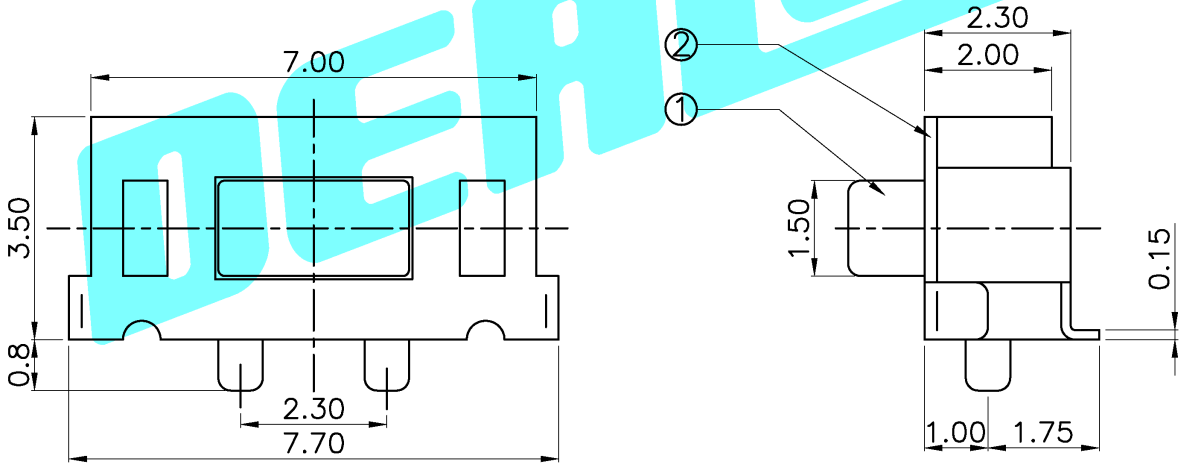

PART NO.	
TD-1112SA	TD-1112SN

NO.1	
PART NO	vigor
1	70±30
2	100±50
3	160±50
4	260±50
5	320±80
6	350±80
7	520±130

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

NO.3	
PART NO	NOTE
1~9	SERIAL NUMBER

NO.4	
PART NO	NOTE
B	Bulk
R	Tape&Reel

⑤	Terminal	2	Phosphor Bronze	Plating silver
④	Contact	2	F.Ag/SUS	Natural
③	Base	1	Nylon	White
②	Cover	1	Brass(0.20t)	Plating Nickel
①	Keystoke	1	Nylon	Black
ITEM	PART NAME	QTY.	MATERIAL	FINISHING

APPROVALS		DATE	DERION 德艺隆	
DRAWN	G.M Chen	2014/3/30	ELECTRONICS CO.,LTD	
CHECKED			TITLE:	TACT SWITCHES
APPROVALS			PART NO.	TD-1112SA-AXN-XXX
TOLERANCES ARE		30~以上	±0.30	ANGLE
		10~30	±0.20	
		5~10	±0.15	
		~ 5	±0.10	±2°
		UNIT: mm	SCALE: 1:1	PROJ:
		DRAWING NO.		SHEET 1 OF 1

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.